



BioMixer™ MIStainless Steel Mixer Systems for

AseptiMix™ MI Mixer Bags

Biopharmaceutical process involves a very wide range of process fluids such as media, growth regulators, harvests, post centrifuge supernatants, buffers, process intermediates and formulations.

A critical requirement is mixing of many of these fluids during and between process step(s). Process owners using conventional mixing systems involving glass bottles, large carboys or stainless steel vessels face multiple challenges in terms of extraneous contamination due to multiple open system handling, cleaning validation and documentation.

mdi BioMixer™ MI stainless steel mixer systems along with AseptiMix™ MI 3D mixer bags provide validated and reliable mixing solutions for biopharmaceutical process requirements such as mixing of media, process intermediates, sterile buffers with wide ranging pH, and formulations.

These systems are well designed to provide efficient mixing of even difficult to mix, high concentration, clump forming components.

 $BioMixer^{TM}$ MI is a stand alone mixing system which includes a stainless steel tote for the $AseptiMix^{TM}$ MI mixer bag and a trolley which is prefitted with load cells and a motorized magnetic drive. This makes it an easy to use, user friendly system, where in the mixer bag easily fits on the motorized magnetic drive without any need for alignment.


The stand mounted capacitive touch screen display provides easy control through a user friendly software which helps control mixing speed as well as time.



Key Features



Control panel with capacitive touch screen display

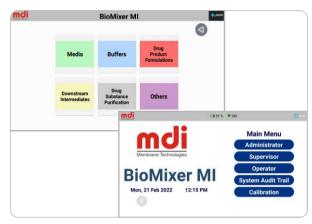

User friendly 21 CFR Part 11 Compliant Software



Easy alignment of *AseptiMix*™ MI Mixer Bag impeller with motor drive



Additional Inflate Bag option:

Does away with Mixer Bag manual alignment




Powder Port Holder for Easy powder bag fitment



Calibrated load cells



Functioning of Magnetic Motor Drive

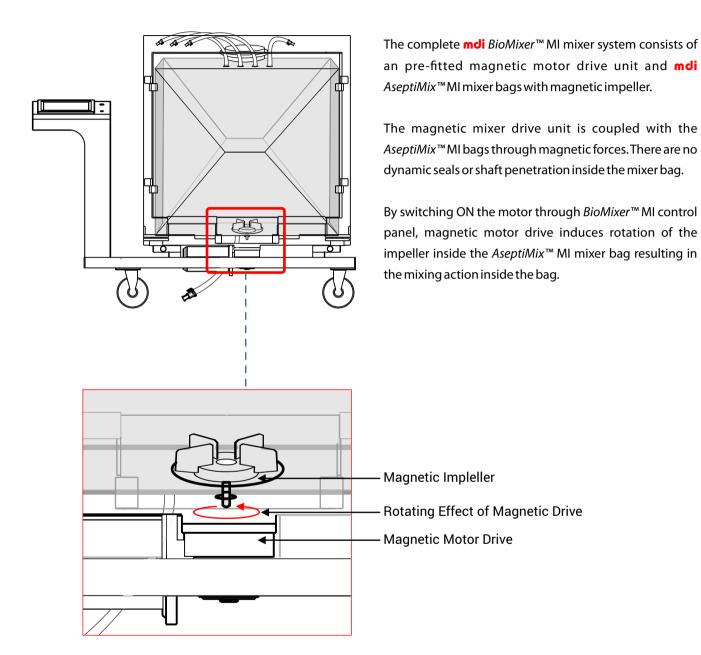



Technical Specifications

Materials of Construction

Mixer Vessel		304 L Stainless Steel	
Surface Finis	sh	Mirror Polished	
Wheels	650 L Mixers	6 inch Polyurethane (PU)	
	200 L Mixers	4 inch Polyurethane (PU)	
	100 L Mixers	4 inch Polyurethane (PU)	

Power Specifications

Voltage		220V AC
Current		1.4 A
Frequency		0-50 Hz
Motor Powe	r	0.55 kW
	650 L Mixers	5-350 rpm
Impeller Range	200 L Mixers	5-250 rpm
	100 L Mixers	5-250 rpm

Load Cells

Capacity		800 kg
	650 L Mixers	0.4kg
Least Count	200 L Mixers	0.06kg
	100 L Mixers	0.06kg

Control Panel

Туре	Capacitive Touch Screen
Size	10"
Storage Space	16 GB

21 CFR part 11 Compliance for Data Reliability and Security

- ➤ Three Access levels with Password Security
- System Audit Trail
- Online repository

Wi-Fi Connectivity and Data Back Up

BioMixer™ MI mixer system connects with the external printer and a remote back up data repository.

The remote back up data repository for mixing reports can be set up with an software specially designed for reliability and security.



Support Documents


 $BioMixer^{TM}$ MI mixer system comes with full documentation which is easy to follow.


Certificate of Quality		Yes
User Manual		Yes
Installation Qualification (IQ)		Yes
Operational Qualification (OQ)	Equipment	Yes
	Application Software	Yes
Performance Qualification (PQ)		Yes




Dimensions


BioMixer™ MI 100 Litres

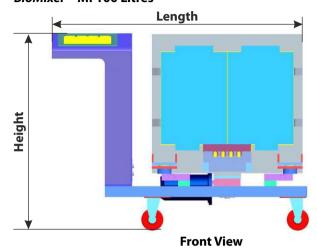

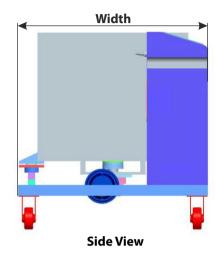


BioMixer™ MI 200 Litres

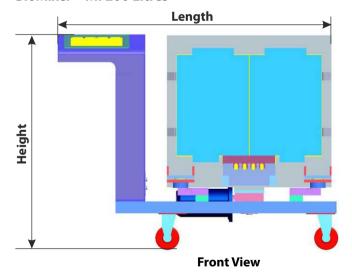


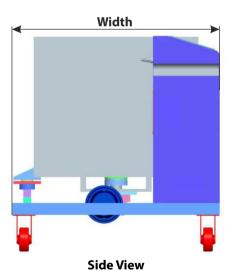



BioMixer™ MI 650 Litres

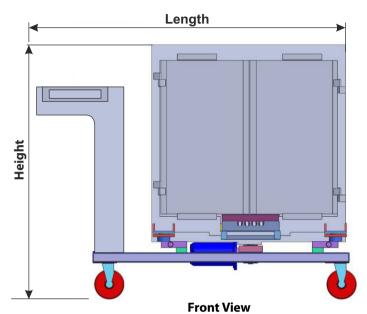

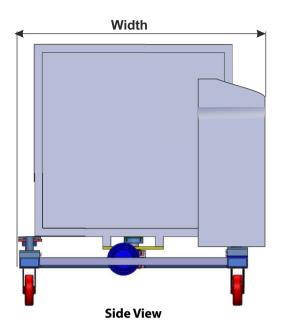

Dimensions	100 L Mixers	200 L Mixers	650 L Mixers
Length	109 cm	118 cm	152 cm
Width	77 cm	88 cm	118 cm
Height	85 cm	88 cm	130 cm

Ordering Information

Capacity	Catalog No.
100 Litres	BMIXIXXXXXXXX01
200 Litres	BMIXJXXXXXXXX01
650 Litres	BMIXOXXXXXXXX01