Datasheet

ClariPro GK

Hydrophilic PES Membrane Large Capsule Filters

ClariPro GK hydrophilic PES membrane large capsule filters are ready to use, disposable filtration devices. These are specially designed filters incorporating a microglass fiber upstream layer and a downstream PES membrane final layer and are used as pre-filters in biopharmaceuticals process development as well as manufacturing process for difficult to filter solutions.

The microglass fiber layer offers high dirt holding capacity and efficient retention of colloidal particles to give clear downstream in case of difficult to filter turbid solutions. The downstream PES membrane offers absolute retention, and low protein binding along with high flow rates.

Quality Assurance

These filter devices are manufactured in class 10,000 clean rooms under ISO 9001 certified quality management systems and are deeply validated to meet compendia and regulatory requirements.



Applications

- Precipitate removal post viral inactivation
- Pre-filtration of serum solutions
- Clarification of cell harvest supernatants
- Polishing of turbid solutions


Specifications

			Construction			
Pore Size		0.1μm, 0.2μm, 0.5μm				
Membrane			Hydrop	hilic PES		
Pre-filter			Microg	lassfiber		
Support Layers	S		Poly	rester		
Body and Core	2		Polypro	opylene		
		Integr	ity Testing/Rete	ention		
Bacterial Retention		0.1μm: LRV> 6 for <i>B.diminuta</i> ATCC 19146 per cm ² of filter area 0.2μm: LRV> 5 for <i>B.diminuta</i> ATCC 19146 per cm ² of filter area				
			Size			
Size		5″	10"	20"	30"	
Effective Filtration Area (Nominal)		2500 cm ²	5000 cm ²	10000 cm ²	15000 cm ²	
Vent and Drair	١	1/4"				
			Operational			
Max. Operating Temperature		80 °C @ ≤ 30 psi (2 Kg/cm²)				
Max. Different	ial Pressure	60 psi (4 Kg/cm²) @ 30 °C				
Ctarilization	By Gas	Sterilizable by Ethylene Oxide				
Sterilization	By Autoclave	Autoclavable at 125 °C for 30 minutes, 25 cycles. Can not be in-line steam sterilized				
			Assurance			
Toxicity		Passes Biological reactivity Test, In Vivo, as per USP <88> for Class VI plastics				
Fiber Release		Passes test as per USP and comply with USFDA 21 CFR Part 210.3(b)(6) for fiber release				
Particle Release	e	The filtrate complies with USP <788> test for particulate matter in injections				
Extractables w	rith WFI	Passes test as per USP <661>				
Oxidizable Substances		Passes test as per USP <1231>				

DST LGKXXXX1421A

Water Flow Rates

ClariPro GK- 0.5µm

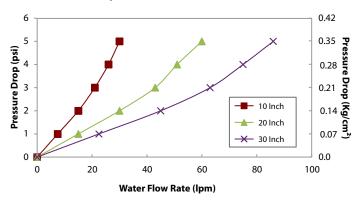

Ordering Information

Туре		
	Code	
ClariPro GK	LGKX	

Size			Pore	Size
	Code			Code
5″	53		0.1 μm	36
10"	54		0.2 μm	01
20"	55		0.5 μm	04
30"	56	'		

ore Size		Inlet/Outlet		
	Code		Code	
μm	36	1½" Sanitary Flange	Е	
2 μm	01	Single Step ½" Hose Barb	Q	
μm	04	¾" Sanitary Flange***	S	
		3/8" Hose Barb	- 1	
		1" Hose Barb *	Z	

х	Inline / T-lin		
		Cod	
	Inline	Х	
	T-line**	Т	

Sterility		
	Code	
Non Sterile	1	
EO Sterile	2	

Pack	Pack Size			
	Code			
1	01			

Example:

LGKX	54	04	EE	Х	Т	1	01	
------	----	----	----	---	---	---	----	--

^{* 1&}quot; Hose Barb connection is not available in 5" capsule filters

Advanced Microdevices Pvt. Ltd.

20-21, Industrial Area, Ambala Cantt-133 006, INDIA

Tel: +91-171-2699290, 2699471 E-mail: info@mdimembrane.com Website: www.mdimembrane.com

DST LGKXXXX1421A 2

^{**} T-line is not available in 5" Capsule filter

^{**}T-line Capsule Filter are available with 11/2" Sanitary Flange I/O Connection only

^{***3/4&}quot; Sanitary Flange is available only in 5" and 10" capsule filters